




Grafibind Holland

KIRK-RUDY 219 RSF PLOWFOLD SYSTEM

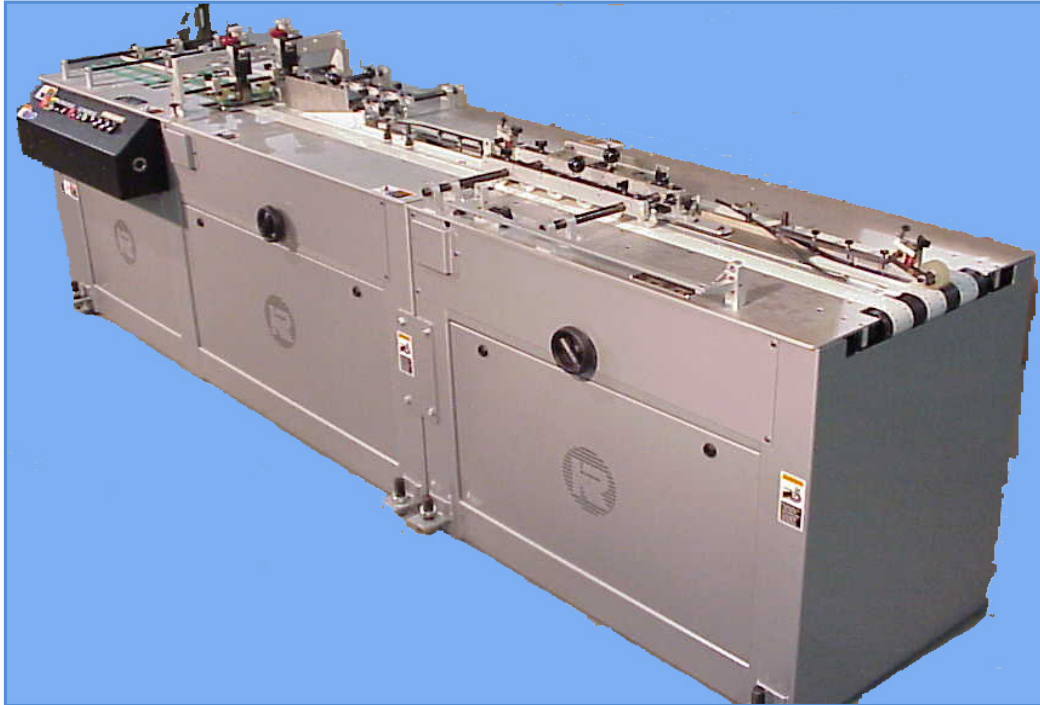

ADD FOLDING CAPACITY TO YOUR KR 215 CARD ATTACHING SYSTEM

Features:

- Side register infeed for consistent folding
- Two adjustable scoring wheels
- Vacuum top holds piece throughout the scoring and folding process
- Exceptionally quick setup
- Single and bi-fold configuration
- Runs in-line with most standard mail and attaching systems

Specifications:

- Electrical Requirements: 220 VAC, 30 amps
- Operating Speeds:
 - ◆ Motor with gear reduction (standard)
60 meter/minute
 - ◆ Motor without gear reduction (optional)
150 meter/minute*Note: Production speeds depend on product*
- ◆ Media:
 - ◆ Minimum: 125mm x 100 mm
(width x length)
 - ◆ Maximum: 600 mm x 430 mm
(width x length)
- ◆ Machine dimensions:
 - ◆ Single fold: 207 cm x 89 cm x 84 cm
Length x Width x Height
 - ◆ Bi-fold: 314 cm x 89 cm x 84 cm
Length x Width x Height
- ◆ Bi-fold runs Z and C folds

Specifications subject to change without notification



Official Kirk-Rudy® distributor

Grafibind Holland B.V. De Steiger 185, 1351 AT Almere, The Netherlands
Tel +31 (0)36-5402564, Fax +31 (0)36-5404530, www.grafibind.com, info@grafibind.nl