




Grafibind Holland

KR415 INTERFACE CONVEYOR

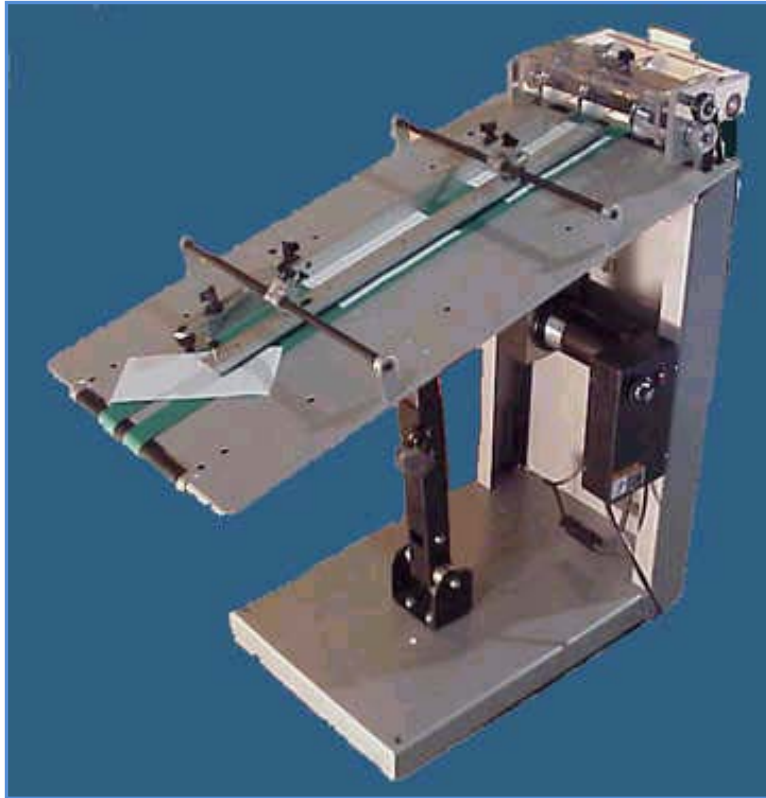

Features:

- Integrated bump turn – right or left hand
- Top belt ensures smooth transition to tabber or inline inkjet base
- Quick-release top belt control
- “No tools” pivoting infeed
- Industry standard motors and controls
- Runs inline with most folders and tabbing systems

Specifications:

Electrical Requirements

- 220 VAC
- 50/60 Hz
- 5 amps

Maximum Operating Speed

- 170 mtr/min.

Production speeds are product dependent

Physical size

- Length: 98 cm
- Width: 45 cm
- Height: 84 cm

Media

- Minimum: 9 cm x 12.5 cm
- Maximum: 23 cm x 30 cm
- Thickness: single sheet



Official Kirk-Rudy® distributor

Grafibind Holland B.V. De Steiger 185, 1351 AT Almere, The Netherlands
Tel +31 (0)36-5402564, Fax +31 (0)36-5404530, www.grafibind.com, info@grafibind.nl