




Grafibind Holland

KR 496 VACUUM SHUTTLE FEEDER

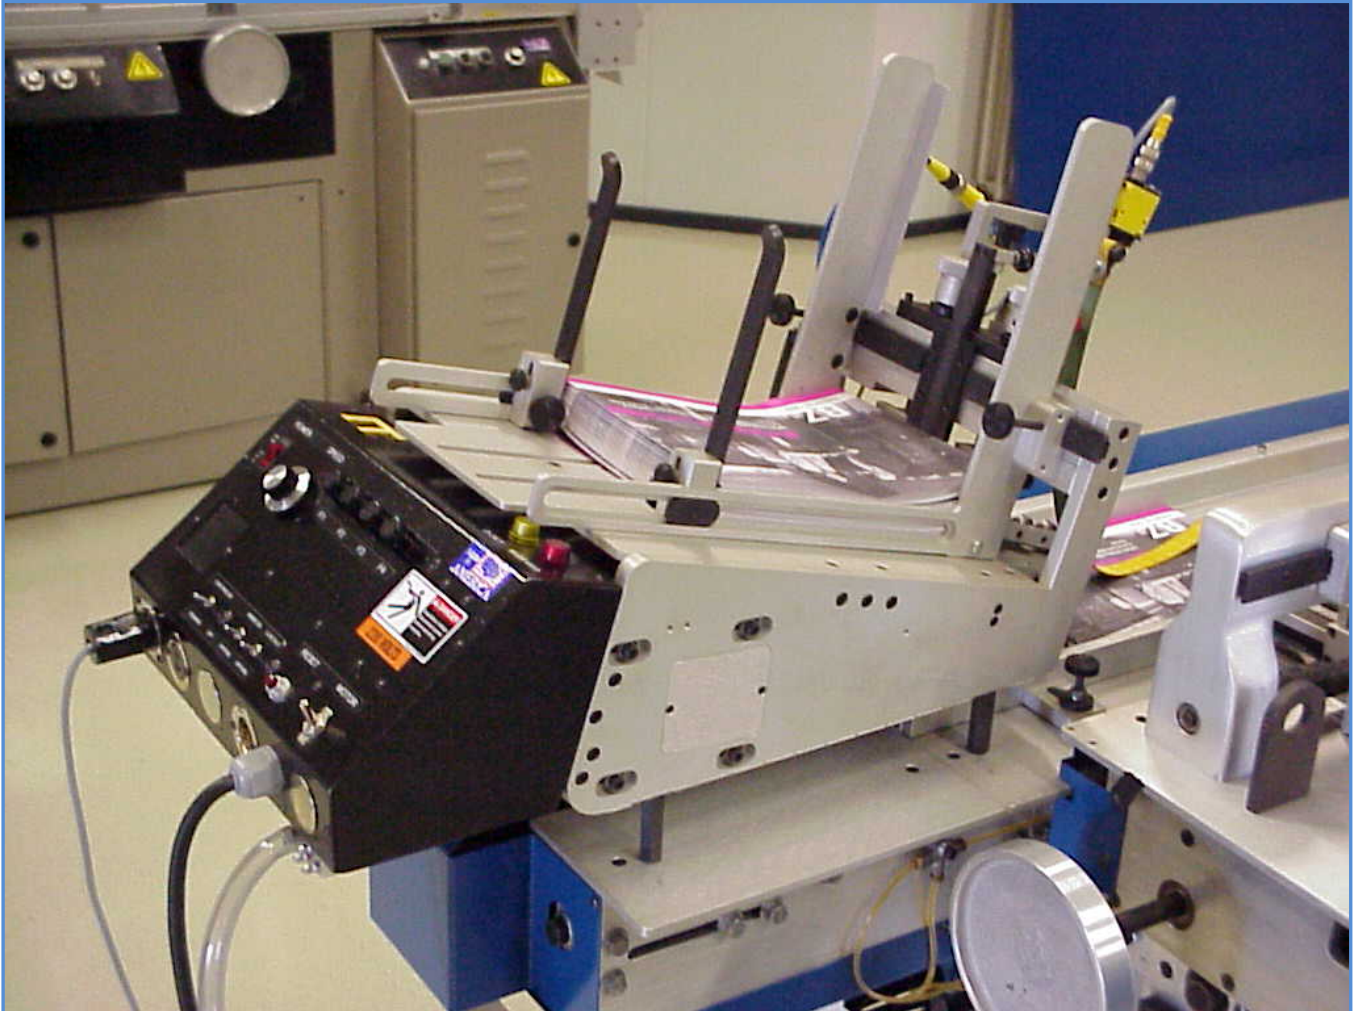

Note: Guards have been removed for clarity, do not operate machine without guards in place

Specifications:

Electrical Requirements

- 220 V
- 2.0 Amp
- 60 Hz

Media Size:

- Minimum: 50 mm x 89 mm
- Maximum: 270 mm x 350 mm
- Minimum Thickness: 1 mm
- Maximum Thickness: 6,5 mm

Features:

- Feed on demand
- Continuous feed
- Portable design
- Can be equipped for batch counting
- Miss feed and double feed detection
- External stop

Note: Specifications subject to change without notification



Official Kirk-Rudy® distributor

Grafibind Holland B.V. De Steiger 185, 1351 AT Almere, The Netherlands
Tel +31 (0)36-5402564, Fax +31 (0)36-5404530, www.grafibind.com, info@grafibind.nl